

Bubble

Designed by Eero Aarnio 1968

"I had the idea of a transparent ball, where light comes from all directions. Acrylic can be heated and blown into shape like a soap bubble, and I knew that domeshaped skylights were made that way..."



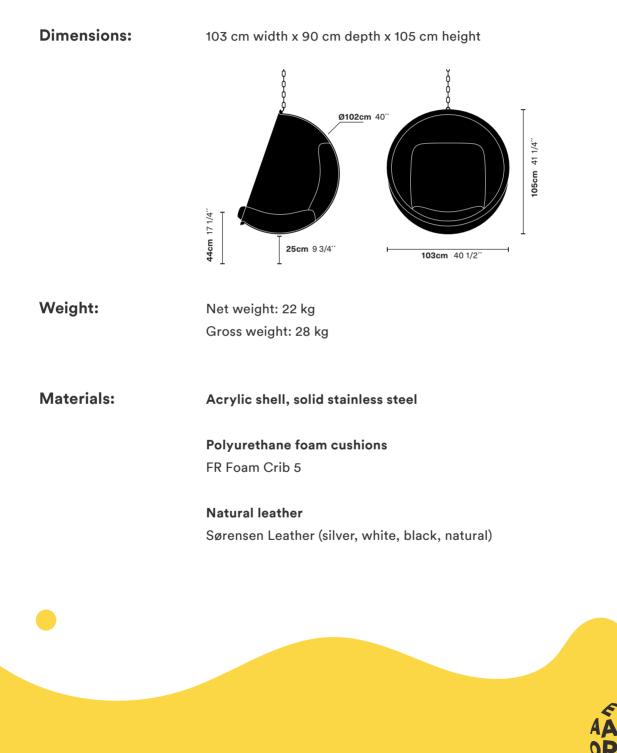


Technical details of the leather

Thickness:	1.0-1.2 mm		
Property	Requirements	Result	Standard
Lightfastness:	4	5	ISO 105-B02
Dry 500 rubs:	4	5	ISO 11640
Wet 80 rubs:	4	5	ISO 11640
Perspiration 50 rubs:	4	5	ISO 11640
Finish adhesion:	1,5	1,5	ISO 1644
Tearing load:	20	20	ISO 3377-1
Flexing endurance:	50,000	50,000	ISO 5402-1
Cigarette + Match test:	-	non-ignition	UNI EN 1021
Flame retardant test:		passed	CA TB 117-20030

PCP: According to EU Council Directive 76/769/EEC AZO dyes: According to EU Council Directive 76/769/EEC Chrome VI: Our leather does not contain chrome VI REACH: According to European Community Regulation on chemicals and their safe use (EC 1907/2006)

Please see www.sorensenleather.com for more information



Savanne Silver 30350

