
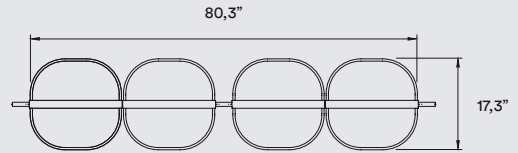


Will be available for production from November 2022

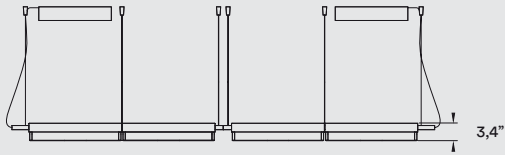

REF.

OM S2X2 BK LED DIM0-10V UL
 OM S2X2 BK LED DIMTRIAC UL
 OM S2X2 IV LED DIM0-10V UL
 OM S2X2 IV LED DIMTRIAC UL
 OM S2X2 GD LED DIM0-10V UL
 OM S2X2 GD LED DIMTRIAC UL

LIGHT SOURCE



120 - 277V: Dimmable 0-10V or TRIAC

Drivers:

2 Constant Current 1400mA

LED Integrated:

Led module
 Energy class A*

2.700K, CRI>90, 48W, 50-60Hz, 4200 lm*

4.000K, CRI>90, 48W, 50-60Hz, 4200 lm*

*Measurements obtained by theoretical calculations at LZf using ivory white shades. Veneer Ref: 23 Natural White.

PACKAGING

Box 1: 47 × 26 × 8" | 5,5 ft³ | 11,5 Lb

Box 1: 47 × 26 × 8" | 5,5 ft³ | 11,5 Lb

Weight: Total Gross - 30,8 Lb | Total Net - 23 Lb

MATERIALS & COMPONENTS

Wood Veneer Shade

Matt Satin Acrylic Bottom Diffuser

Metal Structure

2 Black Metal Canopy: 14 × 2 × 3" - disc 4,5"

6 Black Steel Cables: 9 ft drop

2 Black Coaxial Cable: 9 ft drop

FINISHES

WOOD VENEER

21 Natural Cherry

23 Natural White

22 Natural Beech

METAL

BK-Matt Black

GD-Gold

IV-Matt Ivory